2010.0 RANGE ROVER SPORT (LS), 501-19

#### **BUMPERS**

## FRONT BUMPER COVER (G1249603)

REMOVAL AND INSTALLATION

76.22.72 BUMPER VALANCE - FRONT -RENEW

BUMPER VALANCE ALL - FRONT - DERIVATIVES

USED WITHINS

1.7

#### REMOVAL

△ NOTE:

Removal steps in this procedure may contain installation details.

<sup>1.</sup> Disconnect the battery ground cable.

Refer to: Specifications (414-00 Battery and Charging System

- General Information, Specifications).

# <sup>2.</sup> WARNING:


Make sure to support the vehicle with axle stands.

Remove the front road wheels and tires.


### △ NOTE:

The procedure must be carried out on both sides.


Refer to: Headlamp Assembly (417-01 Exterior Lighting, Removal and Installation).

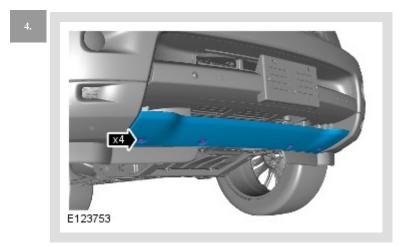




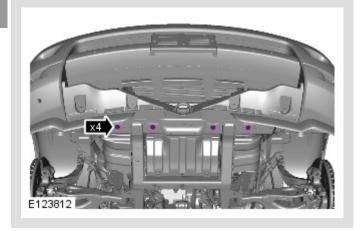




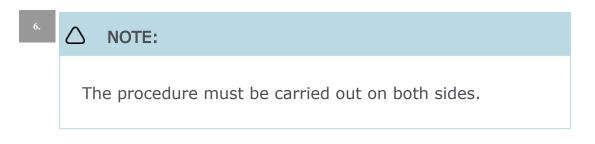


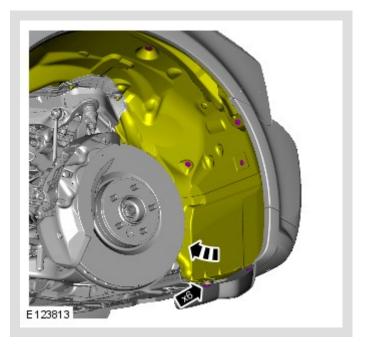


Torque: 1 Nm

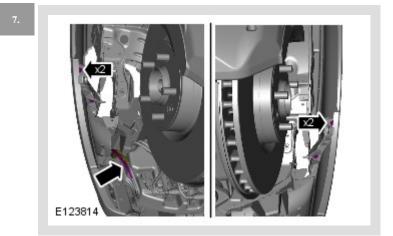

Torque: 5 Nm

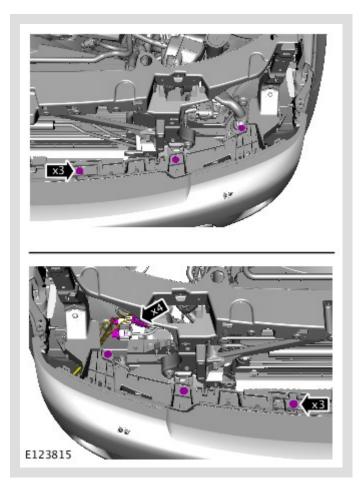

Torque: 5 Nm

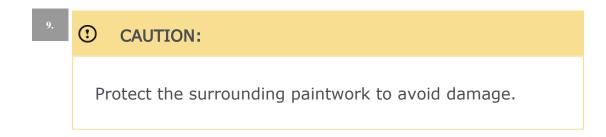

NOTE: Δ

This step requires the aid of another technician.




### △ NOTE:

Do not disassemble further if the component is removed for access only.





### **()** CAUTION:


Make sure that the component is correctly located on the locating dowels.

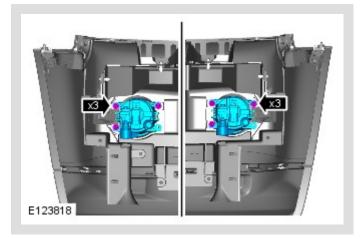


Torque: 5 Nm

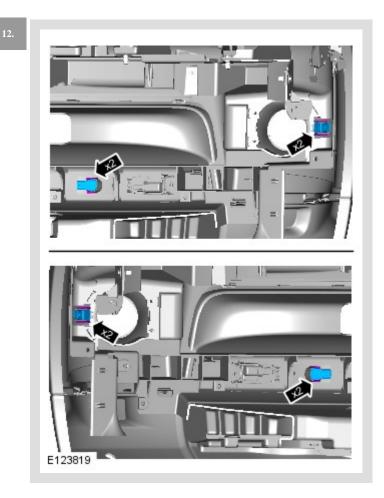

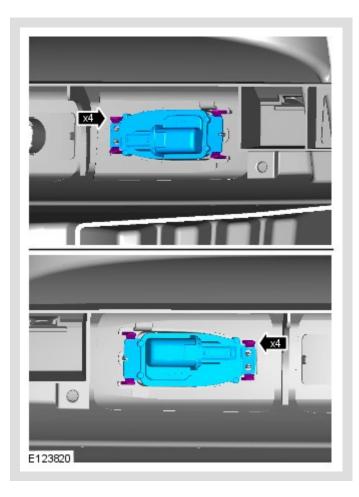

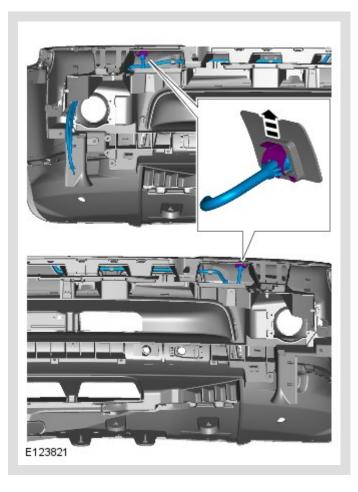

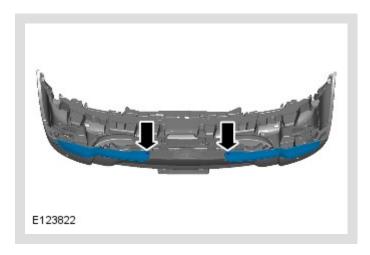

Torque: 1 Nm

