


C-Pillar Upper Trim Panel (76.13.35)

Removal

- 1 . Release the door aperture weatherstrip.

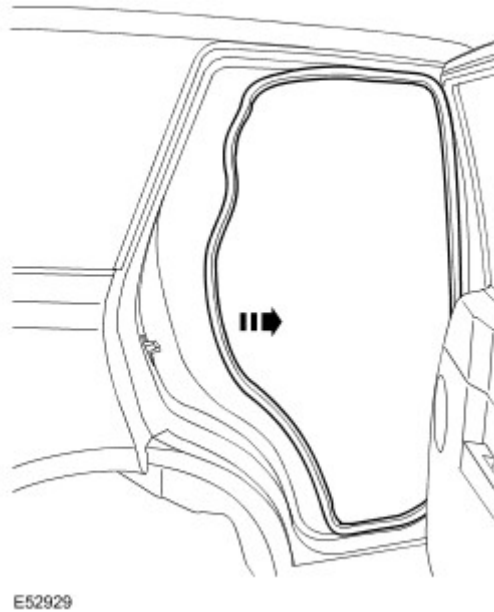

- 2 . Release the front edge of the lower quarter trim panel.
- 3 . Release the upper trim access cover.

4 . **NOTE:**


Do not disassemble further if the component is removed for access only.

Remove the C-pillar upper trim panel.

- Remove the Torx screw.
- Release the 2 clips.



- 5 . Remove the 2 C-pillar retaining clips.

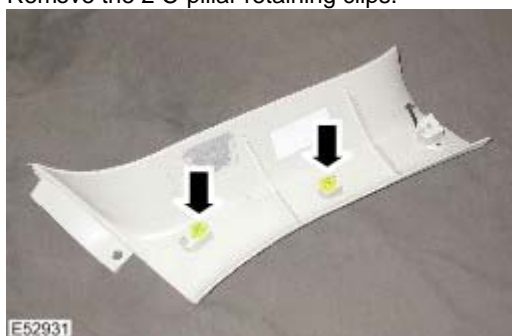

Installation

- 1 . Install the clips to the C-pillar upper trim panel.
- 2 . Install the C-pillar upper trim panel.
 - Attach the safety belt.
 - Secure with the clips.
 - Tighten the Torx screw to 6 Nm (4 lb.ft).
- 3 . Install the lower quarter trim panel
 - Carefully secure the clips.
- 4 . Install the upper trim access cover.
- 5 . Install the door aperture weatherstrip.