



Rear View Mirrors - Exterior Mirror

Removal and Installation


Removal

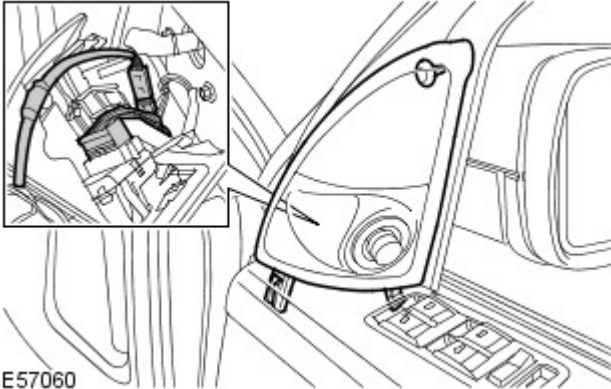

1. Remove the cheater panel.
 - Carefully release the 3 clips.
 - Disconnect the 2 electrical connectors.

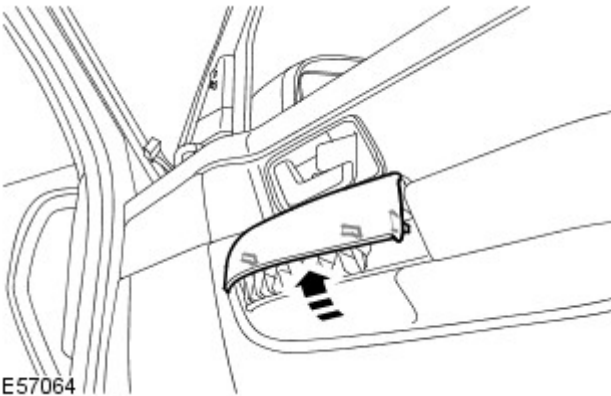


2. Starting at the lower edge, carefully remove the grab handle cover.
 - Release the 2 clips.

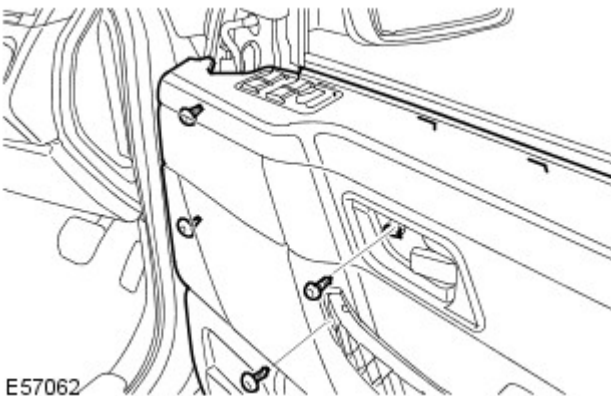

3. Release the forward upper corner of the front door trim panel.
 - Release the screw cover.
 - Remove the 2 screws.
 - Release the 5 clips.

4. Remove the exterior rear view mirror.
 - Disconnect the electrical connectors.
 - Remove the 3 bolts.

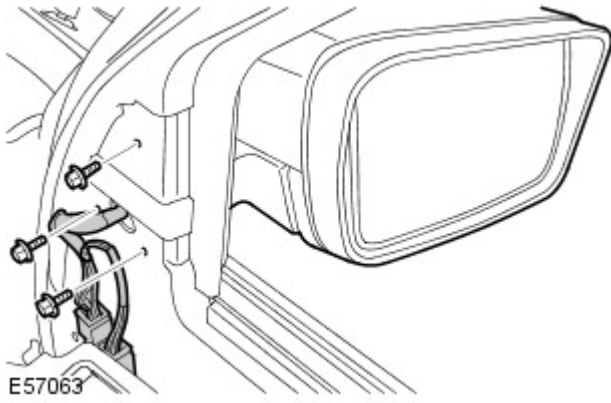

Installation

1. Install the exterior rear view mirror.
 - Tighten the bolts to 6 Nm (4 lb.ft).
 - Connect the electrical connectors.
2. Secure the front door trim panel.
 - Secure the clips.
 - Install the screws.
 - Install the screw cover.
 - Install the grab handle cover.
3. Install the grab handle cover.
4. Install the cheater panel.
 - Connect the electrical connectors.
 - Secure the clips.