
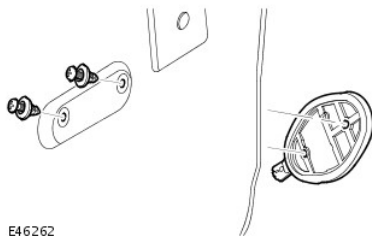
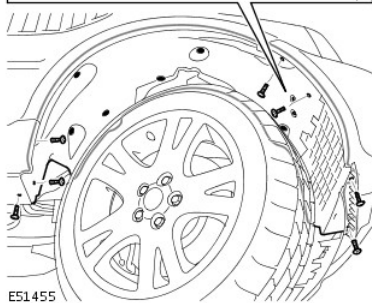
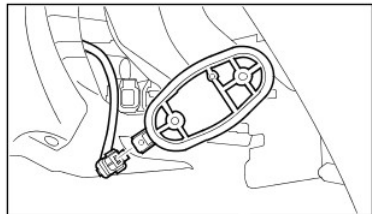


Front End Body Panels - Fender Splash Shield


Removal and Installation

Removal

All vehicles

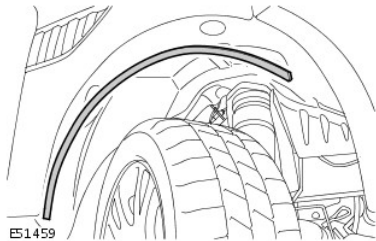

Vehicles with supercharger

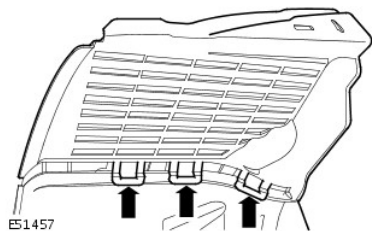

Installation

Vehicles with supercharger

All vehicles

1. ⚠ WARNING: Do not work on or under a vehicle supported only by a jack. Always support the vehicle on safety stands.

Raise and support the vehicle.

2. Remove the fender seal

3. Remove the fender splash shield.

- Release the 6 clips.
- Remove the 7 screws.
- Disconnect the electrical connector.

4. NOTE: Do not disassemble further if the component is removed for access only.

Remove the tire pressure antenna.

- Release the 2 clips.

5. NOTE: Right-hand shown, left-hand similar.

Remove fender splash shield grille.

- Release the 3 clips and remove the cover.

1. Install the fender splash shield grille.

- Secure with the clips.

2. Install the tire pressure antenna.

3. Install the fender splash shield.

- Tighten the screws.

- Install the clips.
- Connect the electrical connector.

4. Install the fender seal.