


Towing Bars

MULTI-HEIGHT DROP PLATE TOW BAR DIMENSIONS

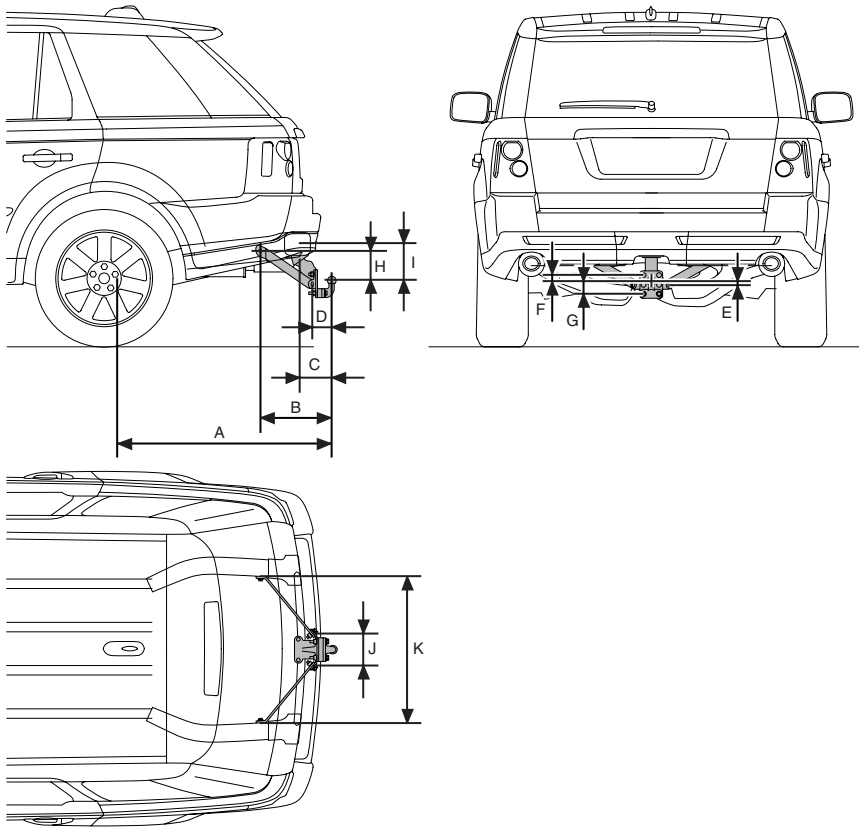

H6225N

Towing Bars

A	Wheel centre to centre of towball (horiz)	1 210 mm	47.64 in.
B	Centre of outer attachment points to centre of towball (horiz)	403.6 mm	15.89 in.
C	Centreline of housing bayonet slot tip radius to centre of towball (horiz)	192.4 mm	7.57 in.
D	Centre of inner attachment points to centre of towball (horiz)	108 mm	4.25 in.
E	Centre of inner attachment points to centre of towball (vert)	20 mm	0.79 in.
F	Centre of upper towball plate bolt to centre of towball (vert)	36 mm	1.42 in.
G	Centre of lower towball plate bolt to centre of towball (vert)	70 mm	2.76 in.
H	Centre of outer attachment points to centre of towball (horiz)	167.3 mm	6.59 in.
I	Centreline of housing bayonet slot tip radius to centre of towball (vert)	174.3 mm	6.86 in.
J	Distance between inner attachment point centres	180.5 mm	7.10 in.
K	Distance between outer attachment point centres	822.5 mm	32.38 in.
<i>Dimensions refer to towing equipment officially released by Land Rover</i>			