
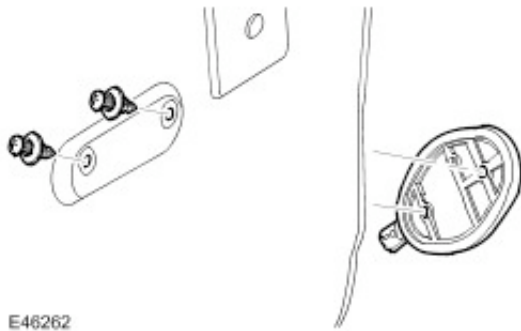


Tire Pressure Monitoring System Front Antenna (86.53.16)

Removal

- 1 . Raise and support the vehicle.
- 2 . Remove the fender splash shield.
For additional information, refer to [Fender Splash Shield \(76.10.48\)](#)
- 3 . Remove the tire pressure antenna.

 Remove the 2 retainers.



Installation

- 1 . To install, reverse the removal procedure.
- 2 . Initiate a new tire pressure antenna using T4.